
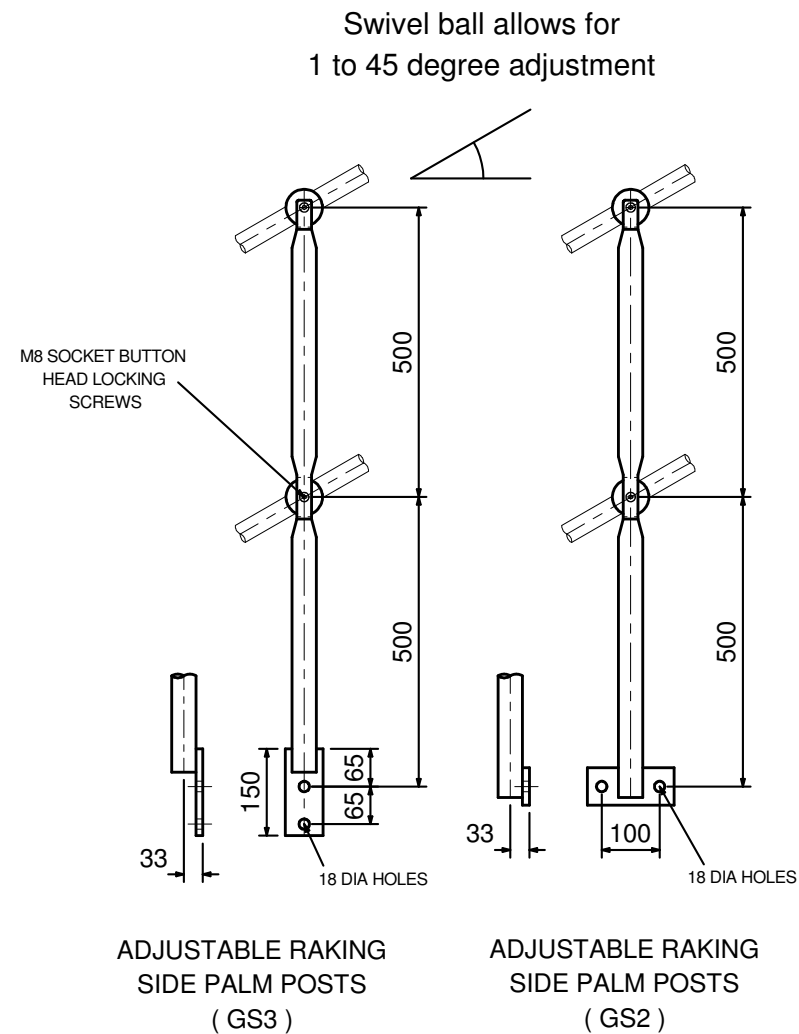


Guardrail Flexi-Rail

Adjustable Rake Handrail System


STANDARD POST COMPONENTS

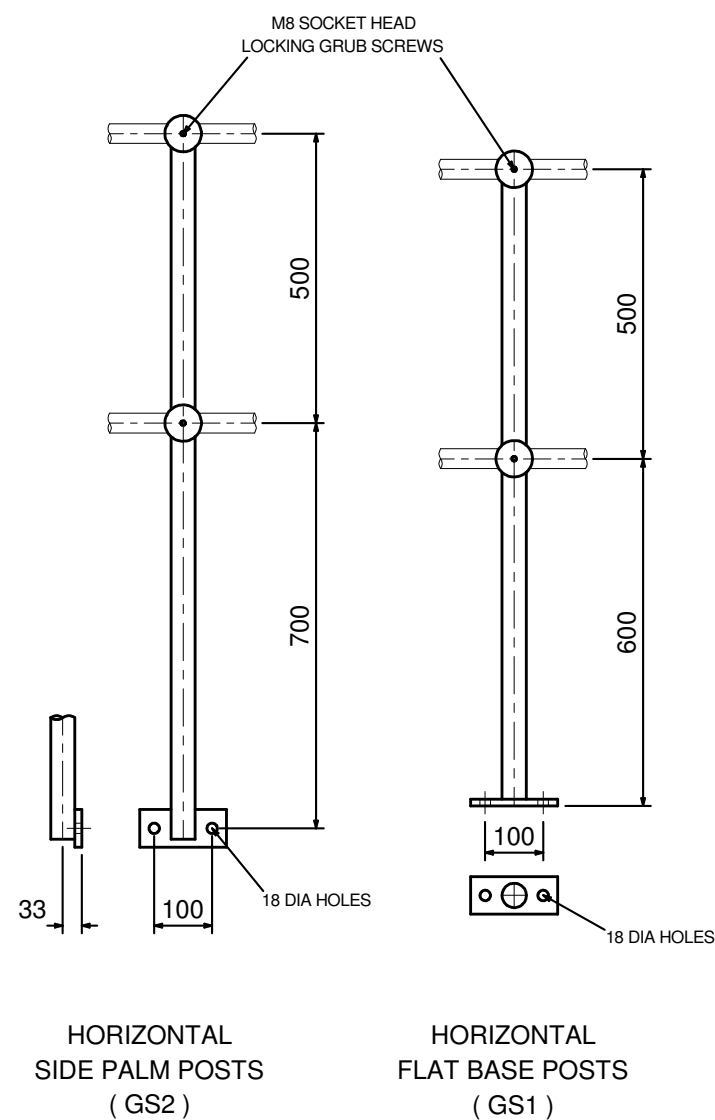

POST MATERIALS:-
 42.4 O/D TUBULAR
 63 DIA BALLS TO SUIT
 33.7 O/D TUBULAR HANDRAILS
 150 X 65 X 12 BASES
 WITH 18 DIA HOLES




Note:
 Typically 1500mm Maximum
 post spacing's to conform
 to EN 14122.

Finish:- Hot dip Galvanised to BS EN 1461.


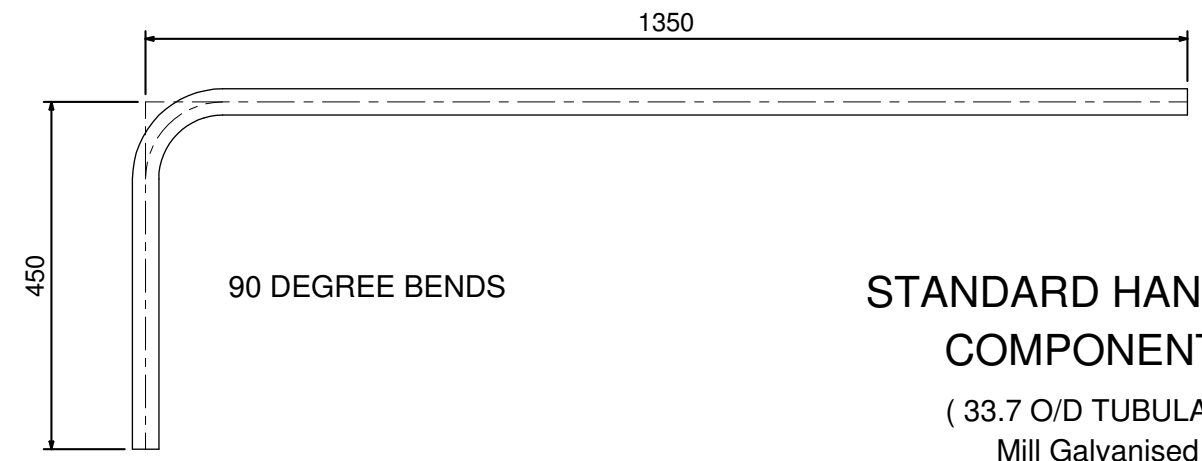


STANDARD HANDRAIL COMPONENTS

(33.7 O/D TUBULAR)
 Mill Galvanised

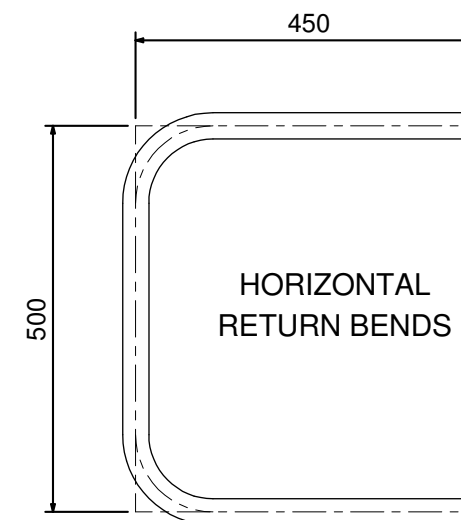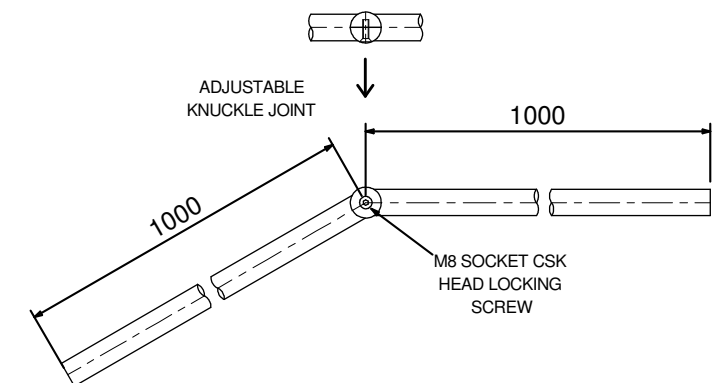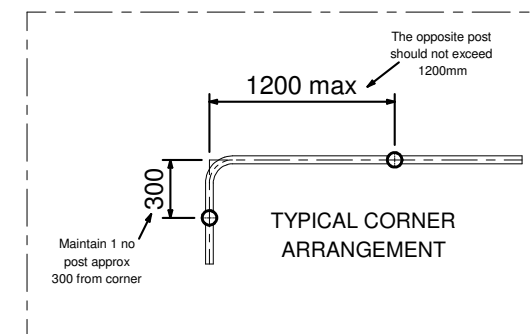

PUSH ON PLASTIC CAPS
 (FOR USE AT OPEN RAIL
 END TERMINATIONS)

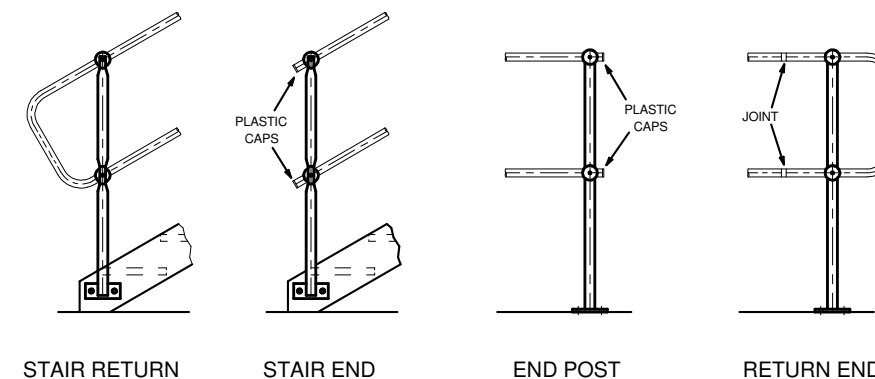

Guardrail

Manders Industrial Estate
 Old Heath Road
 Wolverhampton WV1 2RP
 Tele: 01902-871208
 Fax : 01902-453330
 E-Mail:
 enquiries@guardrailgroup.com
 Website: www.guardrailgroup.com

