

HAMMER DRIVE ANCHOR WITH NAIL

Hammer drive anchor, made from corrosion resistant zamak alloy.

TYPE HN



ADVANTAGES

- Pre-assembled for quick and easy use.
- Hammer-in fixing, no setting tool needed.
- Heat resistant.

FUNCTIONING

- Push-through installation.
- When hammered in, the plug will expand in 2 directions.
- For use in pre-drilled holes in solid materials.

INSLAGNAGEL

Zamac inslagnagel.

VOORDELEN

- Voorgemonteerd voor tijdsbesparing bij installatie.
- Eenvoudige installatie.
- Hittebestendig.

TOEPASSING

- Doorsteekmontage.
- De plug wordt door het aanbouwdeel gestoken en klemt zich tegen het boorgat wanneer de nagel wordt ingeslaan.
- Voor gebruik in volle bouwstoffen.

CHEVILLE À FRAPPER

Cheville à frapper en zamac.




AVANTAGES

- Le clou est prémonté dans la cheville pour un gain de temps de pose.
- Installation facile.
- Résistant à la chaleur.

APPLICATION


- Installation traversante.
- La cheville est installée en traversant la pièce à fixer et s'écarte dans le trou lorsque le clou est enfoncé.
- A utiliser dans des matériaux de base solides.

INSTALLATION SCHEME

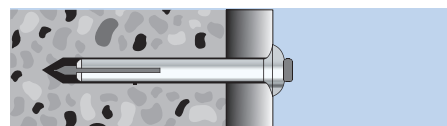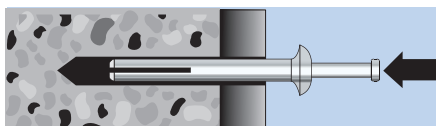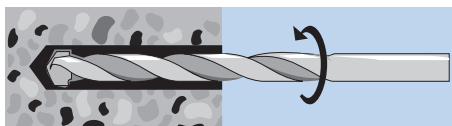

INFO

d (mm)	l (mm)	d ₀ (mm)	h ₁ (mm)	d _s (mm)	h _{ef} (mm)	t _{fix} (mm)
5	22	5	37	10	15	7
6	30	6	45	13	20	10
6	40	6	55	13	20	20
6	50	6	65	13	20	30
6	65	6	80	13	20	45

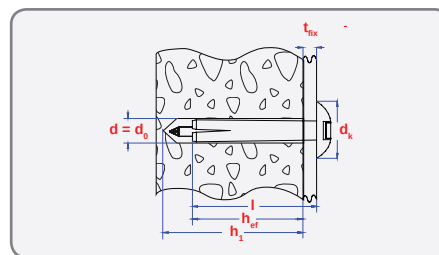

Carton box packing - Kartonverpakking - Boîte carton

size	pgb code	EAN13	
5x22	SM00HN0010500223	5902134708553	200
6x30	SM00HN0010600303	5902134708560	200
6x40	SM00HN0010600403	5902134708577	200
6x50	SM00HN0010600503	5902134708584	200
6x65	SM00HN0010600653	5902134708591	200



Window box packing - Vensterdoos - Boîte à fenêtre

size	pgb code	EAN13	
5x22	SM00HN001050022E	5902134705385	100
6x30	SM00HN001060030E	5902134705392	50
6x40	SM00HN001060040E	5902134705408	25
6x50	SM00HN001060050E	5902134705415	25
6x65	SM00HN001060065E	5902134705422	25

LOADS - BELASTINGEN - CHARGES

Recommended loads for a single anchor. ¹⁾

Maximaal aanbevolen belasting voor één anker.

Charges maximales recommandées pour un ancrage simple.

Type HN			ø 5	ø 6
Concrete / Beton / Béton	C20/25	[kN]	0,44	0,60
Solid brick / Volle baksteen / Brique pleine	≥ Mz 12	[kN]	0,40	0,45

¹⁾including / inclusief / inclusif safety factor 5.